arXiv:1106.1220v1 [cs.SY] 7 Jun 2011

Impulse response of a generalized fractional second order filter[☆]

Zhuang Jiao[a,b], YangQuan Chen[b]

[a]*Department of Automation, Tsinghua University, Beijing, 100084, P.R. China*
[b]*Center for Self-Organizing and Intelligent Systems(CSOIS), ECE Department, Utah State University, Logan, UT 84322, USA*

Abstract

The impulse response of a generalized fractional second order filter of the form $(s^{2\alpha} + as^{\alpha} + b)^{-\gamma}$ is derived, where $0 < \alpha \leq 1$, $0 < \gamma < 2$. The asymptotic properties of the impulse responses are obtained for two cases, and the two cases show the similar properties for the changing of γ values. It is shown that only when $(s^{2\alpha} + as^{\alpha} + b)^{-1}$ has the critical stability, the generalized fractional second order filter $(s^{2\alpha} + as^{\alpha} + b)^{-\gamma}$ has different properties as we change the value of γ. Finally, numerical examples to illustrate the impulse response are provided to verify the proposed concepts.

Keywords: Generalized fractional second order filter, impulse response, critical stable.

1. Introduction

As the generalization of calculus, fractional calculus [1–4] which deals with derivatives and integrals of arbitrary orders, has a long history of more

[☆]Corresponding author Prof. Y. Q. Chen. T/F:1(435)797-0148/3054
Email addresses: jiaoz07@ mails.tsinghua.edu.cn (Zhuang Jiao), yqchen@ieee.org, yqchen@ece.usu.edu (YangQuan Chen)

than 300 years old, however, the theory of fractional calculus achieved great improvement mainly from the 19th century. Recently, the applications of fractional calculus is becoming a hot topic, on one hand, using the notion of fractional calculus equations, it may be a step closer to the real world [5], on the other hand, fractional calculus provides a powerful tool for the description of memory and hereditary effects in various substances and in modeling dynamical processes in fractal media [6]. For more knowledge of the applications of fractional calculus in modern science and engineering, please refer to [7–18].

In the branch of fractional-order signal processing, fractional order filter is a fundamental issue, for it can be applied in signal modeling, filter design, controller design [19, 20]. The important step toward the application of fractional order filter is its numerical discretization, and there are mainly two kinds of discretization method, indirect method and direct method. An effective impulse response invariant discretization method was discussed in [21–24]. Analytical impulse response of a fractional second order filter with form $(s^2 + as + b)^{-\gamma}$ is derived in [25], its impulse response invariant discretization is also obtained. Motivated by [25], based on numerical inverse Laplace transform technique, the impulse response of the generalized fractional second order filter $(s^{2\alpha} + as^{\alpha} + b)^{-\gamma}$.

This paper is organized as follows. In Sec. 2, the basic mathematical tools about Laplace transform, Z transform and fractional calculus are recalled. In Sec. 3, the main results about impulse response of generalized fractional second order filter is given. The numerical examples to illustrate the proposed concepts are shown in Sec. 4. The conclusions are included in Sec. 5.

2. Preliminaries

Laplace transform [26] is a widely used integral transform. Denoted $L\{f(t)\}$, it is a linear operator of a function $f(t)$ with a real argument t ($t \geq 0$) that transforms it to a function $F(s)$ with a complex argument s. The Laplace transform of a function $f(t)$, defined for $t \geq 0$, is the function $F(s)$, defined by:

$$F(s) = L\{f(t)\} = \int_0^{\infty} e^{-st} f(t) dt$$

The inverse Laplace transform is given by the following complex integral:

$$f(t) = L^{-1}\{F(s)\} = \frac{1}{2\pi i} \int_{\sigma - i\infty}^{\sigma + i\infty} e^{st} F(s) ds$$

where σ is a real number so that the contour path of integration is in the region of convergence of $F(s)$.

Z-transform [27] is considered as a discrete-time equivalent of the Laplace transform in mathematics and signal processing, it converts a discrete time-domain signal, which is a sequence of real or complex numbers, into a complex frequency-domain representation. The single-sided Z transform of a discrete-time signal $x[n]$ is the function $X(z)$ defined by:

$$X(z) = Z\{x[n]\} = \sum_{n=1}^{\infty} x[n] z^{-n}$$

The inverse Z transform is defined as:

$$x[n] = Z^{-1}\{X(z)\} = \frac{1}{2\pi i} \oint_C X(z) z^{n-1} dz$$

where C is a counterclockwise closed path encircling the origin and entirely in the region of convergence. The contour C must encircle all of the poles of $X(z)$.

In order to utilize fractional calculus for the discussion in this paper, some fundamental knowledge of fractional calculus is recalled.

The uniform formula of fractional-order integral is defined as follows:

$$ {}_0\mathrm{D}_t^{-\alpha} f(t) := \mathrm{D}^{-\alpha} f(t) = \frac{1}{\Gamma(\alpha)} \int_0^t (t-\tau)^{\alpha-1} f(\tau) d\tau $$

where $\alpha > 0$, $f(t)$ is an arbitrary integrable function.

The Laplace transform is a fundamental tool in systems and control engineering, so Laplace transforms for the defined fractional-order operators are given below. Laplace transforms for fractional-order integral operator is:

$$ L\left\{\mathrm{D}^{-\alpha} f(t)\right\} = s^{-\alpha} F(s) $$

3. Main results

In this section, the impulse responses of a generalized fractional second order filter $\left(s^{2\alpha} + as^{\alpha} + b\right)^{-\gamma}$ for two different cases are obtained.

3.1. Case 1. $\alpha = 1$

In this case, the poles of $G_1(s) = \frac{1}{(s^2+as+b)^{\gamma}}$ are $s_1 = \frac{-a-\sqrt{a^2-4b}}{2}$ and $s_2 = \frac{-a+\sqrt{a^2-4b}}{2}$. Let $g_1(t) = L^{-1}\left\{G_1(s)\right\}$ denotes the inverse Laplace transform of $G_1(s)$, it can be known from [25] that $L^{-1}\left\{\frac{1}{(s-s_i)^{\gamma}}\right\} = \frac{t^{\gamma-1}e^{s_i t}}{\Gamma(\gamma)}$, $(i = 1, 2)$, and $g_1(t) = L^{-1}\left\{\frac{1}{(s-s_1)^{\gamma}}\right\} * L^{-1}\left\{\frac{1}{(s-s_2)^{\gamma}}\right\}$, where $*$ denotes the convolution on $[0, t]$, then the following lemma can be obtained.

Lemma 1. *([25]) For* $G_1(s) = \frac{1}{(s^2+as+b)^{\gamma}}$, $g_1(t)$ *has the following expressions: (i) if* $a^2 - 4b = 0$, *the poles are* $s_i = -a/2$, $(i = 1, 2)$, *then* $g_1(t) = \frac{t^{2\gamma-1}e^{-at/2}}{\Gamma(2\gamma)}$; *(ii) if* $a^2 - 4b > 0$, *the poles are* $s_1 = \frac{-a-\sqrt{a^2-4b}}{2}$ *and* $s_2 = \frac{-a+\sqrt{a^2-4b}}{2}$, *then* $g_1(t) = \frac{e^{s_2 t}}{\Gamma(\gamma)} D^{-\gamma}\left(t^{\gamma-1}e^{(s_1-s_2)t}\right) \leq \frac{t^{2\gamma-1}e^{s_2 t}}{\Gamma(2\gamma)}$;

(iii) if $a^2 - 4b < 0$, *the poles are* $s_1 = \frac{-a-j\sqrt{4b-a^2}}{2}$ *and* $s_2 = \frac{-a+j\sqrt{4b-a^2}}{2}$, *then* $g_1(t) = \frac{e^{s_2 t}}{\Gamma(\gamma)} D^{-\gamma}\left(t^{\gamma-1}e^{(s_1-s_2)t}\right)$, *and* $|g_1(t)| \leq \frac{t^{2\gamma-1}e^{-at/2}}{\Gamma(2\gamma)}$.

When $\gamma = 1$, the infinite property of $g_1(t)$ can be easily derived, which is given as follows.

Remark 1. *For* $G(s) = \frac{1}{s^2+as+b}$, *denote* $g(t) = L^{-1}\{G(s)\}$, *then we have*
(i) if both of the poles lie in the open left half Complex plane, $\lim_{t\to\infty} g(t) = 0$*;*
(ii) if both of the poles lie on the imaginary axis, then $g(t)$ *has undamped oscillation;*
(iii) if both of the poles lie in the open right half Complex plane, then $\lim_{t\to\infty} g(t) = \infty$.

From Lemma 1 and Remark 1, we have the following theorem.

Theorem 1. *For* $G_1(s) = \frac{1}{(s^2+as+b)^\gamma}$, *we have*
(i) if both of the poles lie in the open left half Complex plane, $\lim_{t\to\infty} g_1(t) = 0$ *with* $0 < \gamma < 2$*;*
(ii) if both of the poles lie on the imaginary axis, $g_1(t)$ *has damped oscillation with* $0 < \gamma < 1$*; has undamped oscillation with* $\gamma = 1$*; and has diverging oscillation with* $1 < \gamma < 2$*;*
(iii) if both of the poles lie in the open right half Complex plane, $\lim_{t\to\infty} g_1(t) = \infty$ *with* $0 < \gamma < 2$.

Proof. (i) and (iii) can be easily obtained. For (ii), when $a = 0$, $b > 0$, the poles are $s_1 = -j\sqrt{b}$, $s_2 = j\sqrt{b}$, then we have

$$g_1(t) = \frac{e^{j\sqrt{b}t}}{\Gamma(\gamma)} D^{-\gamma}\left(t^{\gamma-1}e^{-j2\sqrt{b}t}\right) = \frac{e^{j\sqrt{b}t}}{\Gamma(\gamma)^2}\int_0^t (t-\tau)^{\gamma-1}\tau^{\gamma-1}e^{-j2\sqrt{b}\tau}d\tau$$

what's more,

$$|g_1(t)| \leq f(t) * f(t) := \frac{1}{\Gamma(\gamma)^2} \int_0^t (t-\tau)^{\gamma-1} \tau^{\gamma-1} d\tau$$

with $f(t) := \frac{t^{\gamma-1}}{\Gamma(\gamma)}$, then we have $\lim_{t\to\infty} g_1(t) = 0$, when $0 < \gamma < 1$; and $\lim_{t\to\infty} g_1(t) = \infty$, when $1 < \gamma < 2$. When $\gamma = 1$, it is the same case as (ii) in Remark 1.

3.2. Case 2. $0 < \alpha < 1$

In this case, the pseudo-poles of $G_2(s) = \frac{1}{(s^{2\alpha}+as^{\alpha}+b)^{\gamma}}$ are $\lambda_1 = \frac{-a+\sqrt{a^2-4b}}{2}$ and $\lambda_2 = \frac{-a-\sqrt{a^2-4b}}{2}$, denote $g_2(t) = L^{-1}\{G_2(s)\}$, it can be known from [3] that $L^{-1}\left\{\frac{1}{(s^{\alpha}-\lambda_i)^{\gamma}}\right\} = \frac{t^{\alpha\gamma-1}}{\Gamma(\gamma)} E_{\alpha,\alpha}^{(\gamma-1)}(\lambda_i t^{\alpha})$ $(i = 1, 2)$, with $E_{\alpha,\beta}^{(\gamma)}(t)$ denotes the generalized Mittag-Leffler function with three parameters, then $g_2(t) = L^{-1}\left\{\frac{1}{(s^{\alpha}-\lambda_1)^{\gamma}}\right\} * L^{-1}\left\{\frac{1}{(s^{\alpha}-\lambda_2)^{\gamma}}\right\}$. When $\gamma = 1$, the infinite property of $g_2(t)$ can be easily derived, which is given as the following lemma.

Lemma 2. *([28]) For* $G_0(s) = \frac{1}{s^{2\alpha}+as^{\alpha}+b}$, *let* $g_0(t) = L^{-1}\{G_0(s)\}$, *we have*
(i) if both the poles lie on the left of line l *in Complex plane,* $\lim_{t\to\infty} g_0(t) = 0$, *with line* l *defined as* $l := \left\{z = x + iy \,\middle|\, |\arg(z)| = \frac{\pi\alpha}{2}\right\}$;
(ii) if both the poles lie on the line l, $g_0(t)$ *has undamped oscillation;*
(iii) if both the poles lie on the right of line l *in Complex plane,* $\lim_{t\to\infty} g_0(t) = \infty$.

Similar to the analysis in Case 1, we have the following theorem.

Theorem 2. *For* $G_2(s) = \frac{1}{(s^{2\alpha}+as^{\alpha}+b)^{\gamma}}$, *then we have*
(i) if both of the poles lie on the left of line l *in Complex plane ,* $\lim_{t\to\infty} g_2(t) = 0$ *with* $0 < \gamma < 2$;

(ii) if both of the poles lie on the line l, $g_2(t)$ has damped oscillation with $0 < \gamma < 1$; has undamped oscillation with $\gamma = 1$; and has diverging oscillation with $1 < \gamma < 2$;

(iii) if both of the poles lie on the right of line l in Complex plane, $\lim_{t\to\infty} g_2(t) = \infty$ with $0 < \gamma < 2$.

PROOF. Let λ_i $(i = 1, 2)$ being the pseudo-poles of $G_2(s)$, denote

$$f_i(t) := L^{-1}\left\{\frac{1}{(s^\alpha - \lambda_i)^\gamma}\right\} = \frac{t^{-1}}{\Gamma(\gamma)} \sum_{k=0}^{\infty} \frac{\Gamma(1+k)\lambda_i^{1+k-\gamma} t^{\alpha(1+k)}}{\Gamma(2+k-\gamma)\Gamma(\alpha k+\alpha)} \quad (i = 1, 2)$$

then $g_2(t) = f_1(t) * f_2(t)$.

When $\gamma = 1$, denote $f_i(t)$ as $f_{i1}(t)$, then $f_{i1}(t) = \frac{1}{t}\sum_{k=0}^{\infty} \frac{\lambda_i^k t^{\alpha(1+k)}}{\Gamma(\alpha k+\alpha)}$, and the properties of $g_2(t)$ are given in Lemma 2.

When $0 < \gamma < 1$, denote $f_i(t)$ as $f_{i0}(t)$, and we have

$$\begin{aligned} |f_{i0}(t)| &= \left| \tfrac{t^{-1}}{\Gamma(\gamma)} \sum_{k=0}^{\infty} \tfrac{\Gamma(1+k)\lambda_i^{1+k-\gamma} t^{\alpha(1+k)}}{\Gamma(2+k-\gamma)\Gamma(\alpha k+\alpha)} \right| \\ &< \tfrac{|\lambda_i|}{t} \sum_{k=0}^{\infty} \tfrac{|\lambda_i|^k t^{\alpha(1+k)}}{\Gamma(\alpha k+\alpha)} = |\lambda_i|\,|f_{i1}(t)| \end{aligned} \tag{1}$$

and

$$\begin{aligned} \left|\dot{f}_{i0}(t)\right| &= \left| \tfrac{t^{-1}}{\Gamma(\gamma)} \sum_{k=0}^{\infty} \tfrac{\Gamma(1+k)\lambda_i^{1+k-\gamma} t^{\alpha(1+k)-1}}{\Gamma(2+k-\gamma)\Gamma(\alpha k+\alpha-1)} \right| \\ &< \tfrac{|\lambda_i|}{t} \sum_{k=0}^{\infty} \tfrac{|\lambda_i|^k t^{\alpha(1+k)-1}}{\Gamma(\alpha k+\alpha-1)} = |\lambda_i| \left|\dot{f}_{i1}(t)\right| \end{aligned} \tag{2}$$

If both of the poles lie on the left of line l in Complex plane, we have $\lim_{t\to\infty} f_{i1}(t) = 0$, then based on (1) and (2), we have $\lim_{t\to\infty} f_{i0}(t) = 0$. From the properties of convolution, we have $\lim_{t\to\infty} g_2(t) = 0$.

If both of the poles lie on line l, we know that $f_{i1}(t)$ has undamped oscillation, then based on (1) and (2), we know $f_{i0}(t)$ has damped oscillation. From the properties of convolution, we know that $g_2(t)$ has damped oscillation.

If both of the poles lie on the right of line l in Complex plane, we have $\lim_{t\to\infty} f_{i1}(t) = \infty$, which means that $\left|\frac{\lambda_i\Gamma(\alpha k)}{\Gamma(\alpha k+\alpha)}\right| > 1$, then for $f_{i0}(t)$, we have $\left|\frac{k}{k+1-\gamma}\right|\left|\frac{\lambda_i\Gamma(\alpha k)}{\Gamma(\alpha k+\alpha)}\right| > 1$ when k is sufficiently large, which means $\lim_{t\to\infty} f_{i0}(t) = \infty$. From the properties of convolution, we have $\lim_{t\to\infty} g_2(t) = \infty$.

When $1 < \gamma < 2$, denote $f_i(t)$ as $f_{i2}(t)$, we have

$$\begin{aligned} |f_{i2}(t)| &= \left|\frac{t^{-1}}{\Gamma(\gamma)}\sum_{k=0}^{\infty}\frac{\Gamma(1+k)\lambda_i^{1+k-\gamma}t^{\alpha(1+k)}}{\Gamma(2+k-\gamma)\Gamma(\alpha k+\alpha)}\right| \\ &> \frac{|\lambda_i|^{1-\gamma}}{t}\sum_{k=0}^{\infty}\frac{|\lambda_i|^k t^{\alpha(1+k)}}{\Gamma(\alpha k+\alpha)} = |\lambda_i|^{1-\gamma}|f_{i1}(t)| \end{aligned} \tag{3}$$

and

$$\begin{aligned} \left|\dot{f}_{i2}(t)\right| &= \left|\frac{t^{-1}}{\Gamma(\gamma)}\sum_{k=0}^{\infty}\frac{\Gamma(1+k)\lambda_i^{1+k-\gamma}t^{\alpha(1+k)-1}}{\Gamma(2+k-\gamma)\Gamma(\alpha k+\alpha-1)}\right| \\ &> \frac{|\lambda_i|^{1-\gamma}}{t}\sum_{k=0}^{\infty}\frac{|\lambda_i|^k t^{\alpha(1+k)-1}}{\Gamma(\alpha k+\alpha-1)} = |\lambda_i|^{1-\gamma}\left|\dot{f}_{i1}(t)\right| \end{aligned} \tag{4}$$

If both of the poles lie on the left of line l in Complex plane, we have $\lim_{t\to\infty} f_{i1}(t) = 0$, which means that $\left|\frac{\lambda_i\Gamma(\alpha k)}{\Gamma(\alpha k+\alpha)}\right| < 1$, then for $f_{i2}(t)$, we have $\left|\frac{k}{k+1-\gamma}\right|\left|\frac{\lambda_i\Gamma(\alpha k)}{\Gamma(\alpha k+\alpha)}\right| < 1$ when k is sufficiently large, which means $\lim_{t\to\infty} f_{i2}(t) = 0$. From the properties of convolution, we have $\lim_{t\to\infty} g_2(t) = 0$.

If both of the poles lie on line l in Complex plane, we know that $f_{i1}(t)$ has undamped oscillation, then based on (3) and (4), we know $f_{i2}(t)$ has diverging oscillation. From the properties of convolution, we know that $g_2(t)$ has diverging oscillation.

If both of the poles lie on the right of line l in Complex plane, we have $\lim_{t\to\infty} f_{i1}(t) = \infty$, then based on (3) and (4), for $f_{i2}(t)$, we have $\lim_{t\to\infty} f_{i2}(t) = \infty$. From the properties of convolution, we have $\lim_{t\to\infty} g_2(t) = \infty$.

Remark 2. *It is difficult to plot the exact analytical solution of $g_2(t)$ from the inverse Laplace transform, so we utilize numerical inverse Laplace transform [25] technique to obtain $g_2(t)$ in numerical examples.*

4. Numerical examples

In this section, numerical examples are shown to demonstrate the effectiveness of the proposed results.

Example 1. For $\alpha = 1$, to verify Theorem 1, the following cases are given: (i) when $a = 1$, $b = 1$, both of the poles lie in the open left half Complex plane, and the impulse response of $G_1(s) = \frac{1}{(s^2+as+b)^\gamma}$ for $\gamma = 0.7$, $\gamma = 1$, $\gamma = 1.3$ is demonstrated in Fig. 1, Fig. 2 and Fig. 3 respectively.

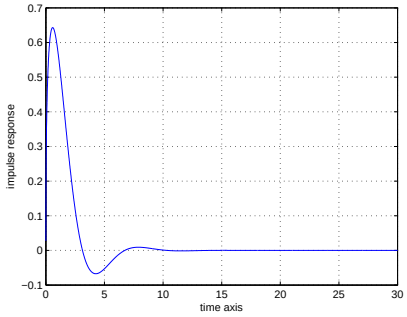


Figure 1: Impulse response for $G_1(s)$ with $a = 1, b = 1, \gamma = 0.7$.

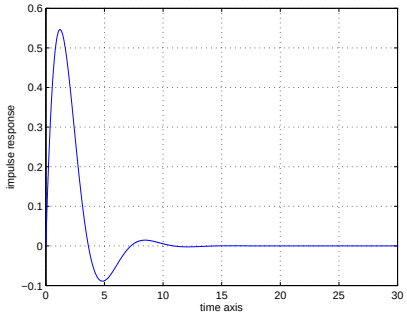


Figure 2: Impulse response for $G_1(s)$ with $a = 1, b = 1, \gamma = 1$.

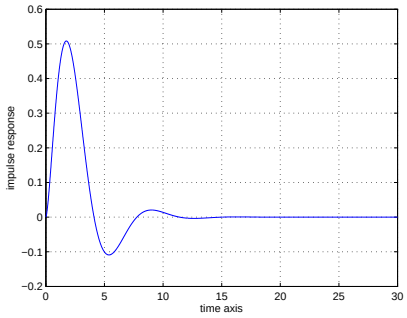


Figure 3: Impulse response for $G_1(s)$ with $a = 1, b = 1, \gamma = 1.3$.

(ii) when $a = 0$, $b = 1$, both of the poles lie on the imaginary axis, and the impulse response of $G_1(s) = \frac{1}{(s^2+as+b)^\gamma}$ for $\gamma = 0.7$, $\gamma = 1$, $\gamma = 1.3$ is demonstrated in Fig. 4, Fig. 5 and Fig. 6 respectively.

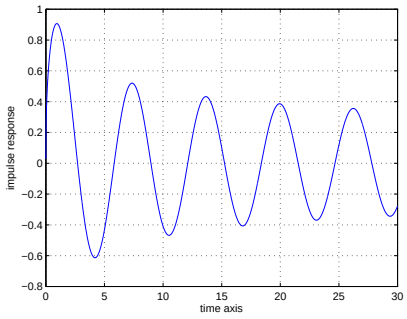


Figure 4: Impulse response for $G_1(s)$ with $a = 0, b = 1, \gamma = 0.7$.

(iii) when $a = -1$, $b = 1$, both of the poles lie in the open right half Complex plane, and the impulse response of $G_1(s) = \frac{1}{(s^2+as+b)^\gamma}$ for $\gamma = 0.7$, $\gamma = 1$, $\gamma = 1.3$ is demonstrated in Fig. 7, Fig. 8 and Fig. 9 respectively.

Example 2. For $0 < \alpha < 1$, we take $\alpha = 2/3$ to verify Theorem 2, the following cases are shown:

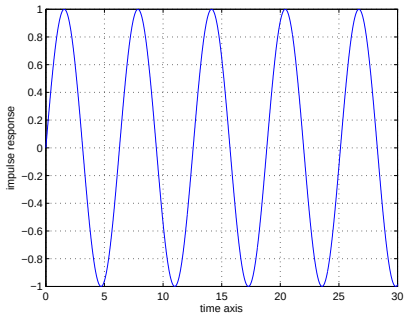


Figure 5: Impulse response for $G_1(s)$ with $a = 0, b = 1, \gamma = 1$.

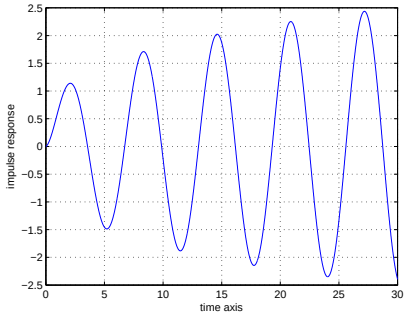


Figure 6: Impulse response for $G_1(s)$ with $a = 0, b = 1, \gamma = 1.3$.

(i) when $a = 1$, $b = 1$, both of the poles lie on the left of line l and the impulse response of $G_2(s) = \frac{1}{(s^{2\alpha}+as^{\alpha}+b)^{\gamma}}$ for $\gamma = 0.7$, $\gamma = 1$, $\gamma = 1.3$ is demonstrated in Fig. 10, Fig. 11 and Fig. 12 respectively.

(ii) when $a = -1$, $b = 1$, both of the poles lie on the line l, and the impulse response of $G_2(s) = \frac{1}{(s^{2\alpha}+as^{\alpha}+b)^{\gamma}}$ for $\gamma = 0.7$, $\gamma = 1$, $\gamma = 1.3$ is demonstrated in Fig. 13, Fig. 14 and Fig. 15 respectively.

(iii) when $a = -2$, $b = 2$, both of the poles lie on the right of line l, and the impulse response of $G_2(s) = \frac{1}{(s^{2\alpha}+as^{\alpha}+b)^{\gamma}}$ for $\gamma = 0.7$, $\gamma = 1$, $\gamma = 1.3$ is

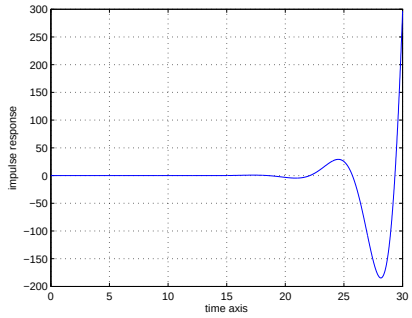


Figure 7: Impulse response for $G_1(s)$ with $a = -1, b = 1, \gamma = 0.7$.

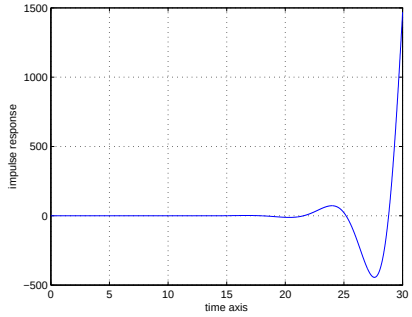


Figure 8: Impulse response for $G_1(s)$ with $a = -1, b = 1, \gamma = 1$.

demonstrated in Fig. 16, Fig. 17 and Fig. 18 respectively.

5. Conclusions

In this paper, we first discussed the impulse responses of generalized fractional second order filter $(s^{2\alpha} + as^{\alpha} + b)^{-\gamma}$ with $0 < \alpha \leq 1$, $0 < \gamma < 2$, and their asymptotic properties are also included. It was shown that the characters of the impulse response were highly related to the location of poles of generalized fractional second order filter $(s^{2\alpha} + as^{\alpha} + b)^{-\gamma}$, the different

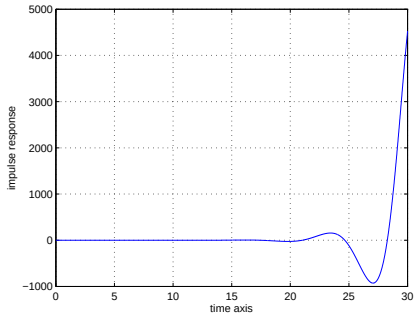


Figure 9: Impulse response for $G_1(s)$ with $a = -1, b = 1, \gamma = 1.3$.

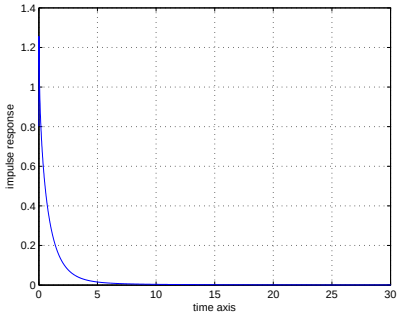


Figure 10: Impulse response for $G_2(s)$ with $a = 1, b = 1, \alpha = 2/3, \gamma = 0.7$.

characters of the impulse response are shown in numerical examples.

Acknowledgment

Zhuang Jiao would like to thank the Tsinghua-Santander Postgraduate Research Scholarship for financial support to his research study in the USA.

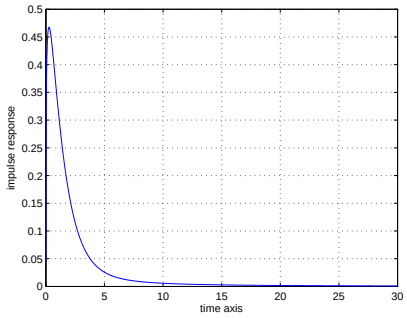


Figure 11: Impulse response for $G_2(s)$ with $a = 1, b = 1, \alpha = 2/3, \gamma = 1$.

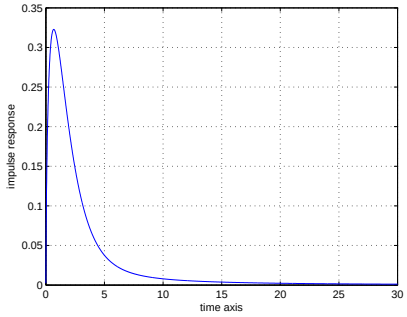


Figure 12: Impulse response for $G_2(s)$ with $a = 1, b = 1, \alpha = 2/3, \gamma = 1.3$.

References

[1] Oldham, K., and Spanier, J., 1974. *The Fractional Calculus.* Academic Press, New York.

[2] Miller, K., and Ross, B., 1993. *An Introduction to the Fractional Calculus and Fractional Differential Equations.* Wiley, New York.

[3] Podlubny, I., 1999. *Fractional Differential Equations.* Academic Press, New York.

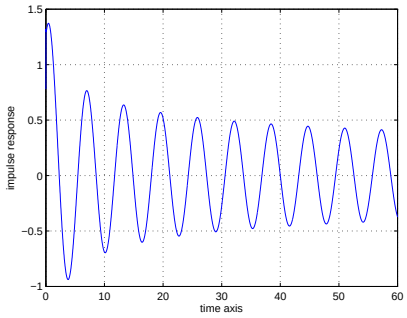


Figure 13: Impulse response for $G_2(s)$ with $a = -1, b = 1, \alpha = 2/3, \gamma = 0.7$.

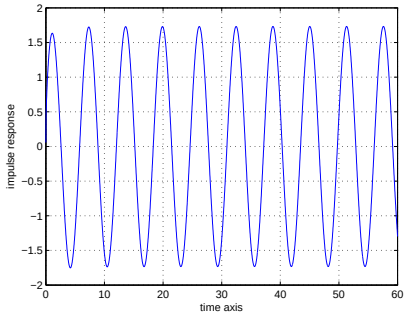


Figure 14: Impulse response for $G_2(s)$ with $a = -1, b = 1, \alpha = 2/3, \gamma = 1$.

[4] Kilbas, A., Srivastava, H., and Trujillo, J., 2006. *Theory and Applications of Fractional Differential Equations*. Elsevier Science Inc., New York.

[5] Torvik, P., and Bagley, R., 1984. "On the appearance of the fractional derivative in the behavior of real materials". *Journal of applied mechanics ASME,* ***51***(22), pp. 294–298.

[6] Mandelbrot, B., 1982. *The Fractal Geometry of Nature*. W.H. Freeman

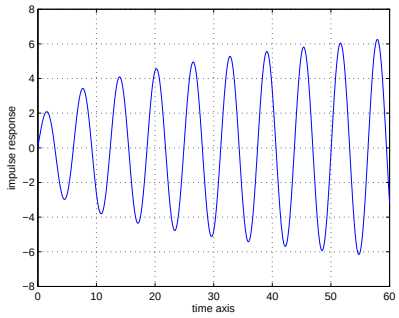


Figure 15: Impulse response for $G_2(s)$ with $a = -1, b = 1, \alpha = 2/3, \gamma = 1.3$.

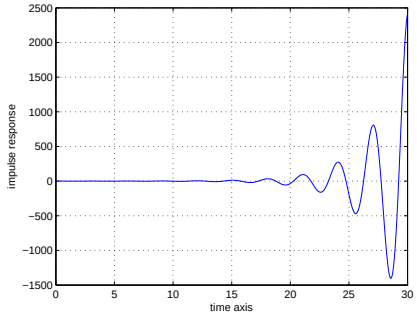


Figure 16: Impulse response for $G_2(s)$ with $a = -2, b = 2, \alpha = 2/3, \gamma = 0.7$.

and Co., San Francisco.

[7] Bagley, R., and Torvik, P., 1983. "A theoretical basis for the application of fractional calculus to viscoelasticity". *Journal of Rheology,* ***27***(3), pp. 201–210.

[8] Podlubny, I., 1999. "Fractional-order systems and $pI^{\lambda}D^{\mu}$ controllers". *IEEE Transactions on Automatic Control,* ***44***(1), pp. 208–214.

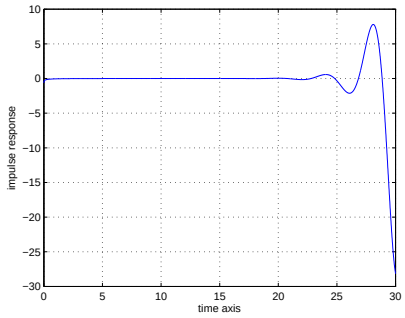


Figure 17: Impulse response for $G_2(s)$ with $a = -2, b = 2, \alpha = 2/3, \gamma = 1$.

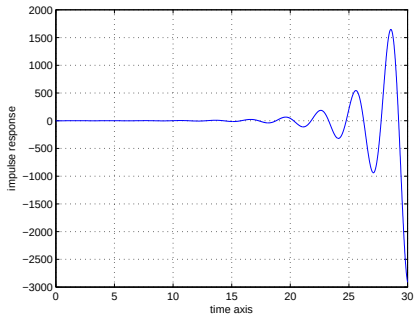


Figure 18: Impulse response for $G_2(s)$ with $a = -2, b = 2, \alpha = 2/3, \gamma = 1.3$.

[9] Laskin, N., 2002. "Fractional schrodinger equation". *Physical Review E,* ***66***(5), p. 7 pages.

[10] Sabatier, J., Agrawal, O., and Machado, J., 2007. *Advances in Fractional Calculus-Theoretical Developments and Applications in Physics and Engineering.* Springer, Netherlands.

[11] Xu, M., and Tan, W., 2006. "Intermediate processes and critical phenomena: theory, method and progress of fractional operators and their

applications to modern mechanics". *Science in China: Series G Physics, Mechanics and Astronomy,* ***49***(3), pp. 257–272.

[12] Chen, Y., and Moore, K. "Analytical stability bound for a class of delayed fractional order dynamic systems". *Nonlinear Dynamics,* ***29***(1).

[13] Ichise, M., Nagayanagi, Y., and Kojima, T., 1971. "An analog simulation of non-integer order transfer functions for analysis of electrode processes". *Journal of Electro analytical Chemistry,* ***33***(2), pp. 253–265.

[14] McAdams, E., Lackermeier, A., McLaughlin, J., Macken, D., and Jossinet, J., 1995. "The linear and non-linear electrical properties of the electrode-electrolyte interface". *Biosensors and Bioelectronics,* ***10***(1), pp. 67–74.

[15] Gaul, L., Klein, P., and Kemple, S., 1991. "Damping description involving fractional operators". *Mechanical Systems and Signal Processing,* ***5***(2), pp. 81–88.

[16] Makris, N., 1991. "Fractional-derivative maxwell model for viscous dampers". *Journal of Structural Engineering,* ***117***(9), pp. 2708–2724.

[17] Bagley, R., and Calico, R., 1991. "Fractional order state equations for the control of viscoelastically damped structures". *Journal of Guidance, Control and Dynamics,* ***14***(2), pp. 304–311.

[18] Clerc, J., Tremblay, A., Albinet, G., and Mitescu, C., 1984. "Ac response of fractal networks". *Journal de Physique Lettres,* ***45***(19), pp. 913–924.

[19] Machado, J. "Analysis and design of fractional-order digital control systems". *Systems Analysis Modelling Simulation,* ***27***(2).

[20] Vinagre, B., Petras, I., Merchan, P., and Dorcak, L., 2001. "Two digital realization of fractional controllers: application to temperature control of a solid". *in Proceedings of the European Control Conference*, pp. 1764–1767.

[21] Chen, Y., and Moore, K., 2002. "Discretization schemes for fractional-order differentiators and integrators". *IEEE Transactions on Circuits and Systems I: Fundamental Theory and Applications,* ***49***(3), pp. 363–367.

[22] Chen, Y., and Vinagre, B., 2003. "A new iir-type digital fractional-order differentiator". *Signal Processing,* ***83***(11), pp. 2359–2365.

[23] Lubich, C., 1986. "Discretized fractional calculus". *SIAM Journal on Mathematical Analysis,* ***17***(3), pp. 704–719.

[24] Chen, Y., Vinagre, B., and Podlubny, I., 2004. "Continued fraction expansion approaches to discretizing fractional order derivatives-an expository review". *Nonlinear Dynamics,* ***38***(16), pp. 155–170.

[25] Li, Y., Sheng, H., and Chen, Y., 2011. "Analytical impulse response of a fractional second order filter and its impulse response invariant discretization". *Signal Processing,* ***91***(3), pp. 498–507.

[26] Davies, B., 2002. *Integral Transforms and their Applications (3rd).* Springer, New York.

[27] Jury, E., 1973. *Theory and Application of the Z-Transform Method*. Krieger Publishing Company.

[28] Monje, C., Chen, Y., Vinagre, B., Xue, D., and Feliu, V., 2010. *Fractional-order Systems and Controls: Fundamentals and Applications*. Springer-Verlag, London.